Technology Solutions for Retail



RFID Care Label
CE332560

Apparel inventory management and supply chain control starting at sourcing; ideal for delicate fabrics, without damaging the garment.


PHYSICAL SPECIFICATIONS

Inlay size	15*40 mm
Product size	60*25 mm
Material	Nylon
Printing	Printed to customer requirements.
Color	White
Mounting method	Sewn


ELECTRICAL SPECIFICATIONS

Protocol	ISO/IEC 18000-6C & EPC global Class 1 Gen 2
Operating frequency	860-960MHz
Integrated Circuit [IC]	NXP U9
EPC Memory	96 bits
User memory	0 bits
Unique TID	48 bits
Kill password	32 bits
Access password	0 bits
Read range	Up to 5 m
Expected read cycles	100,000 cycles
Data retention	10 years

GL Retail & Investments LLC
20801 Biscayne Blvd, Suite 403, Aventura, FL 33180, USA
david@glretail.us
glretail.us

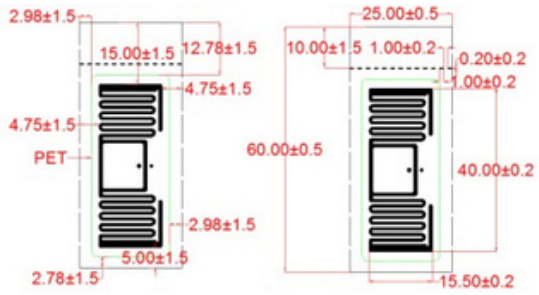

Label Front Side

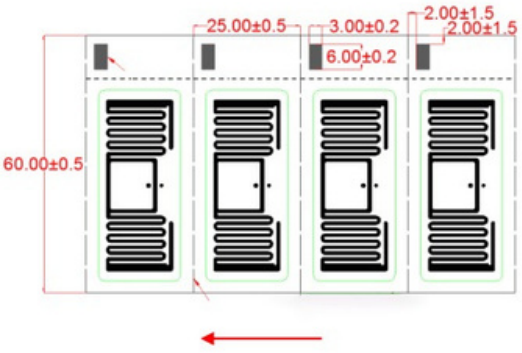

Unwinding Direction

PACKING INFORMATION


Packing format	Carton
Core inner diameter	3 inches
Quantity per roll	8000 pcs
Roll size	≤325 mm
Rolls per box	4
Carton dimensions	340*340*340 mm

ENVIRONMENTAL REQUIREMENTS

Operating temp.	5~60℃
Storage temp.	20~30℃
ESD	2KV
Shelf life	1 year in anti-static bag at 20-30 °C / 20-60 % RH (from manufacture)

READ RANGE

Powered by Tagformance, Voyantlc Ltd.

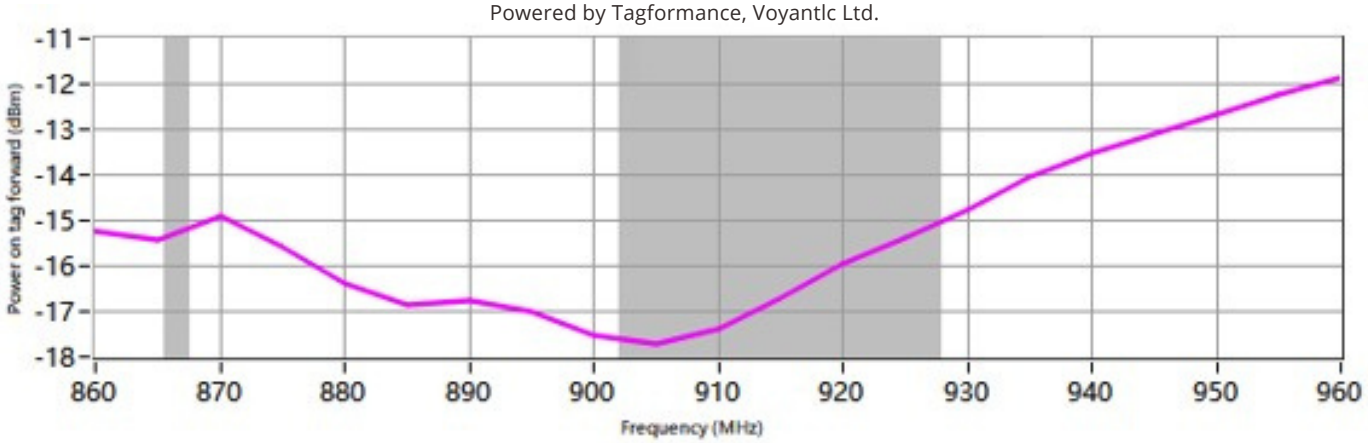

GL Retail & Investments LLC
20801 Biscayne Blvd, Suite 403, Aventura, FL 33180, USA
david@glretail.us
glretail.us