Technology Solutions for Retail


ZipTag CE36037



ZipTag's unique zip-tie design makes it the ideal solution for hard-to-tag assets, including cylinders, tanks, barrels and tools.

Key features:

- Easy, permanent attachment method
- IP67-rated water resistance
- Read range of up to 6 meters
- Custom zip tie length

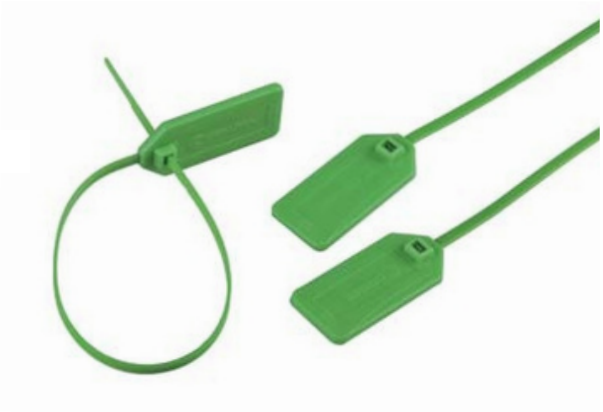

Applications:

- Bottled gas cylinders
- Kegs and beverage tanks
- Cabling
- Medical assets
- Industrial/commercial tools


RAIN RFID

GL Retail & Investments LLC
20801 Biscayne Blvd, Suite 403, Aventura, FL 33180, USA
david@glretail.us
glretail.us

SPECIFICATIONS

Name	ZipTag
Code No.	CE36037
	PHYSICAL
Dimension(mm/in)	60×28×2.7 mm（2.36" ×1.10" ×0.11 in)
Zip Tie Length	300/350/400 mm or customized
Casement	ABS
Color	Green/customized
Printing	Printing and encoding according as customized
Attachment Method	Cable zip tie
	ELECTRICAL
Protocol	ISO/IEC 18000-6C & EPC global Class 1 Gen 2
Operating Frequency	902-928MHz
integrated Circuit [IC]	Monza R6/R6P
EPC Memory	96 Bits / 128 Bits
User Memory	0 Bits / 32 Bits
Unique TID	96 bits
Access Password	0 Bits / 32 Bits
Kill Password Read	0 Bits / 32 Bits
Range(2W EIRP Reader)	EU: Up to 6 meters US: Up to 6 meters
Expected read cycles	100000 cycles
Data retention	10 years
	PACKING
Packing Format	Pieces by pieces and packed in bags
Weight per pieces	8.5 g
Quantity per box	1000 pcs
Box Dimension	40.5×30.5×26 mm（1.59×1.20×1.02 in）
Weight per box	8.5 kg
Quality Assurance	100% performance tested
	ENVIRONMENTAL
OperatingTemperature	-5~ 60℃
Operating Humidity	20%~80% RH
StorageTemperature	20~30℃
Storage Humidity	20% - 70% RH
IP Rating	IP 67
Expected lifetime	2 years

READ RANGE

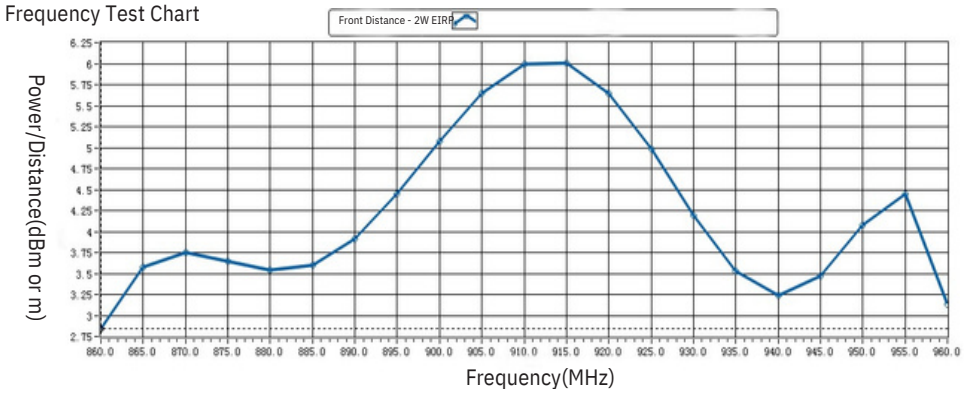

GL Retail & Investments LLC
20801 Biscayne Blvd, Suite 403, Aventura, FL 33180, USA
david@glretail.us
glretail.us